


EDT POLYMER 3-BOLT EXTENSION FLANGED HOUSING



SERIES 3G

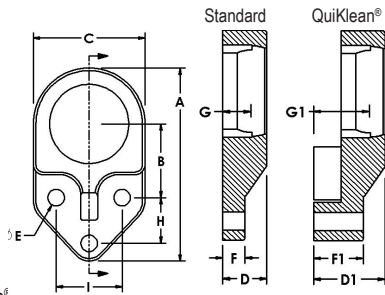

For stainless housing dimensions See page E-3 (Gray)
 For Poly-Round Solution® See page J-3 (Amber)
 For Stainless Ball Solution® See page K-3 (Light Gray)
 For All-Round® Solution® See page C-3 (Blue)
 For interchange information See page T-x (Brown)

PART#	Housing Diameter		A	B	C	D	D1	E	F	F1	G	G1	H	I	Bolt Size	Wt
	mm	in	in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm		lbs
3GA A 203 1.575 40	17	1/2 9/16 5/8 11/16	3-21/32 92.9	1-3/8 34.9	2-3/16 55.6	27/32 21.5	1-15/32 37.4	11/32 8.7	7/16 11.1	1-1/16 27.0	174-32 13.4	1-5/32 29.3	13/16 20.6	1-1/4 31.8	5/16	.1
3GB B 204 1.850 47	20	1/2 9/16 5/8 11/16 3/4 13/16	4-11/32 110.3	1-11/16 42.9	2-9/16 65.1	15/16 24.1	1-37/64 40.0	13/32 10.3	7/16 11.1	1-1/16 27.0	19/32 15.1	1-7/32 31.0	7/8 22.2	1-1/2 38.1	3/8	.2
3GC C 205 2.047 52	25	13/16 7/8 15/16 1	4-3/4 120.7	1-13/16 46.1	2-3/4 69.9	63/64 25.1	1-39/64 41.0	13/32 10.3	1/2 12.7	1-1/8 28.6	5/8 16.1	1-1/4 32.0	1-1/8 28.6	1-5/8 41.3	3/8	.3
3GD D 206 2.441 62	30	1 1-1/16 1-1/8 1-3/16 1-1/4	5-7/16 138.1	2-3/64 52.3	3-1/4 82.6	1-1/16 27.1	1-11/16 43.0	13/32 10.3	1/2 12.7	1-1/8 28.6	41/64 16.7	1-17/64 32.6	1-1/4 31.8	1-7/8 47.6	3/8	.4
3GE E 207 2.835 72	35	1-3/16 1-1/4 1-5/16 1-3/8 1-7/16	6-3/16 157.2	2-3/8 60.3	3-51/64 96.9	1-7/32 31.1	1-27/32 46.9	17/32 13.5	9/16 14.3	1-3/16 30.2	25/32 20.1	1-13/32 36.0	1-1/4 31.8	2 50.8	1/2	.5
3GF F 208 3.150 80	40	1-7/16 1-1/2 1-9/16 1-5/8	6-43/64 170.7	2-9/16 65.1	4-1/4 108.0	1-15/16 31.5	1-55/64 47.4	17/32 13.5	9/16 14.3	1-3/16 30.2	3/4 19.5	1-25/64 35.4	1-3/8 34.9	2-1/4 57.2	1/2	.6
3GG G 209 3.346 85	45	1-1/2 1-5/8 1-11/16 1-3/4	7-3/16 182.7	2-3/4 69.9	4-9/16 115.9	1-15/16 31.5		17/32 13.5	5/8 15.9		3/4 19.4		1-1/2 38.1	2-1/2 63.5	1/2	
3GH H 210 3.543 90	50	1-11/16 1-3/4 1-13/16 1-7/8 1-15/16 2	7-5/8 193.7	2-15/16 74.6	4-7/8 123.8	1-15/16 31.5		17/32 13.5	5/8 15.9				1-5/8 41.3	2-3/4 69.9	1/2	.8
3GI I 211 3.937 100	55	1-15/16 2 2-1/16 2-1/8 2-3/16 2-1/4	8-19/64 212.8	3-1/8 79.4	5-3/8 136.5	1-15/32 37.4		43/64 17.5	11/16 17.5		59/64 23.5		1-3/4 44.5	3 76.2	5/8	1.1
3GJ J 212 4.331 110	60	2-3/16 2-1/4 2-5/16 2-3/8 2-7/16	9-3/16 233.4	3-3/8 85.7	6 152.4	1-21/32 42.2		43/64 17.5	11/16 17.5		1-1/16 27.1		2 50.8	3-1/2 88.9	5/8	1.8
3GK K 214 4.921 125	70	2-7/16 2-1/2 2-5/8 2-11/16 2-3/4	10-19/64 263.6	3-3/4 95.3	6-7/8 174.6	1-21/32 47.2		43/64 17.5	3/4 19.1		1-1/4 31.8		2-3/8 60.3	4-1/4 108.0	5/8	
3GL L 215 5.118 130	75	2-11/16 2-3/4 2-13/16 2-7/8 2-15/16 3	11-1/8 282.6	4 101.6	7-1/8 181.0	1-31/32 50.3		13/16 20.7	1 25.4		1-3/8 35.2		2-5/8 66.7	4-1/4 108.0	3/4	

Load ratings for EDT polymer housings are limited only by the installed bearings.