




## **FRYER BEARINGS**

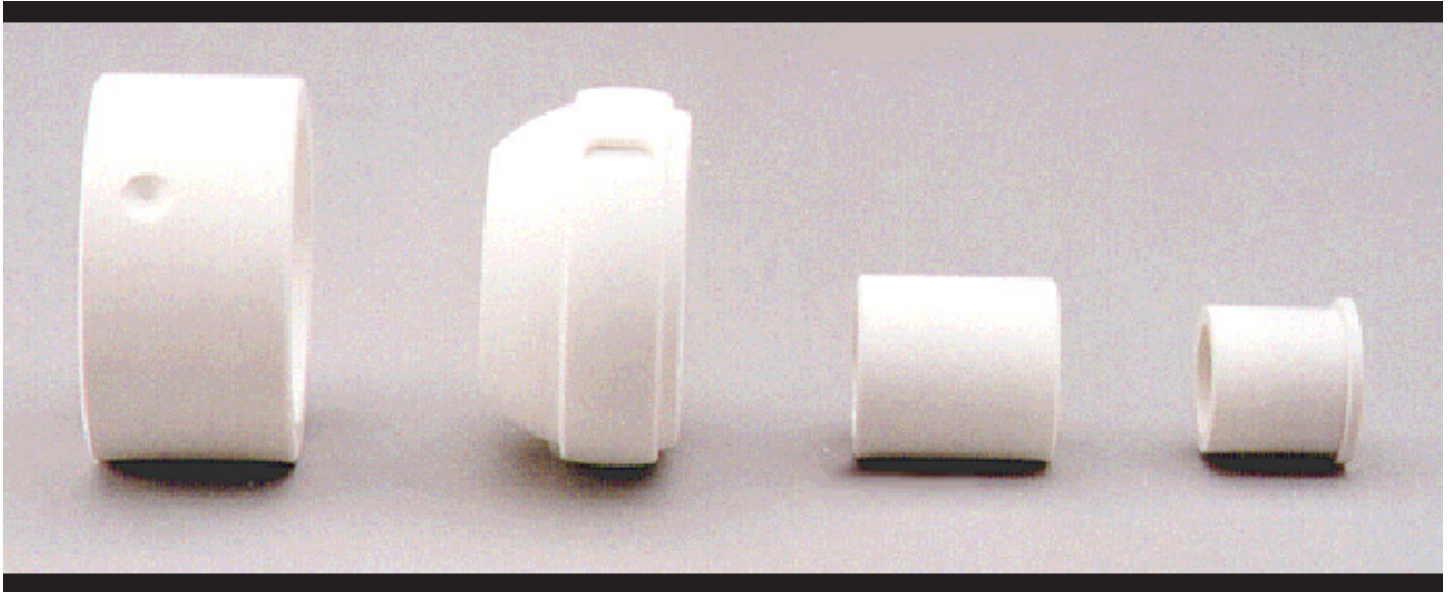

### **Solid polymer bearings for submerged high temperature locations**

- Eliminate rolling element bearing failures
- 'FA' is a white material that is USDA accepted for direct and continuous food contact
- 550°F / 290°C continuous operating temperature
- No lubrication required
- Reduce downtime
- Decrease likelihood of catastrophic failure
- Predictable replacement schedule
- Sanitary
- Interchange with industry-standard bearings  
(sizes for other custom applications are available)

edtcorp.com  
edtsales@edtcorp.com

**EDT CORP**  
1006-J NE 146th Street  
Vancouver, WA 98685

PHONE 360-574-7294  
FAX 360-574-3834