




FRYER BEARINGS

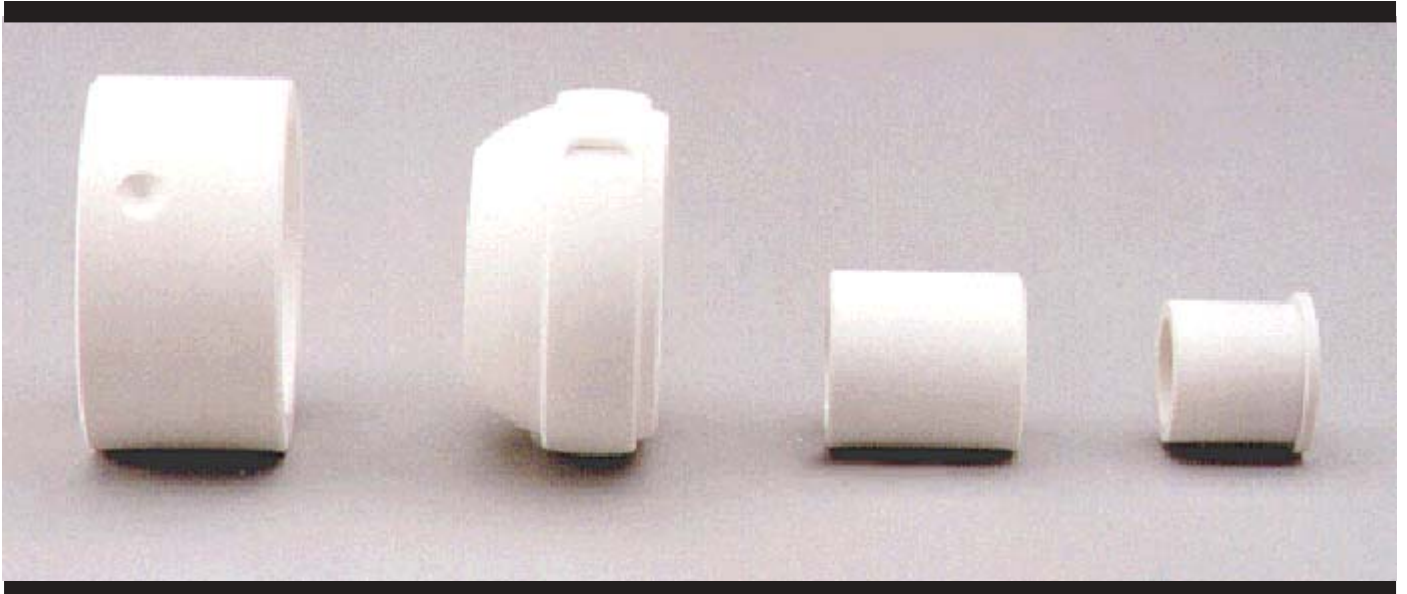

Solid polymer bearings for submerged high temperature locations

- Eliminate rolling element bearing failures
- 'FA' is a white material that is USDA approved for direct & continuous food contact
- 550°F / 290°C continuous operating temperature
- No lubrication required
- Reduce downtime
- Decrease likelihood of catastrophic failure
- Predictable replacement schedule
- Sanitary
- Interchange with industry-standard bearings
(sizes for other custom applications are available)

MEMBER OF 'THE PLANE BEARINGS STANDARDS ASSOCIATION'
P.B.S.A.: DEFINING THE PLANE BEARING FOR INDUSTRY WORLDWIDE

FRYER BEARINGS

High temperature, food-contact approved plane bearings reduce maintenance time with improved reliability and sanitation

Examples of high temperature bearings available from EDT Corp			
EDT P/N	Dimension ID - OD - LTB	Replaces	Location
FAB14-1	1 x 1-3/8 x 1-1/2	Torrington BH-1616	chain tensioner
FAB14-3/4	3/8 x 1-3/8 x 3/4	Torrington YCRS22	chain tensioner
FA1207-3/8	3/8 x 1-1/4 x 3/4	McGill CYR 1-4S cam follower	sprocket idler bearing
FA2006-1	1 x 2 x 9/16	Nice 1641 single row radial ball bearing	
FA2212-1-3/4	1-3/4 x 2-1/4 x 1-1/4		boiling water tank bearing
FA2815-2-1/4	2.2 X 2.8 X 1.5 w/ anti-rotation spot		kettle shaft bearing
FAF1012-1/2	1/2 x 1-1/4 x 3/4 w/ 1" flange		idler sprocket arm
FAB1210-7/8	7/8 x 1-1/4 x 1 w/ 2-3/8" flange		fryer submerger belt
FAF1013-1/2	1/2 x 3/4 x 1-5/16 w/ 1" flange		fryer
FAIUCO-1	52mm OD spherical for 1" shaft	205-ring ball bearing insert	fryer shafting bearing
FAIUOD-1-3/16	62mm OD spherical for 1-3/16" shaft	206-ring ball bearing insert	fryer paddle bearings
FAIUEO-1-7/16	72mm OD spherical for 1-7/16" shaft	207-ring ball bearing insert	fryer paddle bearings
FAIUGO-1-11/16	85mm OD spherical for 1-11/16" shaft	209-ring ball bearing insert	fryer paddle bearings

Other sizes and styles of bearings can be made. Short lead times on most sizes for any quantities.