



NOTHUM FRYER DISCHARGE CONVEYOR BEARINGS


1 Year
GUARANTEED
Application



NA9GB7-3/4

Wire belt conveyor

| | Original Bearing | EDT Bearing |
|----------------------|---|---|
| Bearing | Cast Iron housings with carbon steel ball bearings | NA9GB7-3/4, NA Poly Round® Solution®, solid polymer insert with locking sleeve in EDT polymer housing |
| Failure | Bearing will fail due to corrosion and over or under-greasing and require regular maintenance | Bore elongates over time, but insert can be replaced, housing and sleeve reused. |
| Length of Service | 2-4 months (in washdown) | 12+ months in washdown (guaranteed application) |
| Maintenance Required | Regular greasing and change-outs | Requires no interim maintenance after initial installation. <i>Caution - not for curved conveyors</i> |
| Features & Benefits | Low initial cost | Lower maintenance, reduced maintenance cycles, longer life, lower ownership costs. |

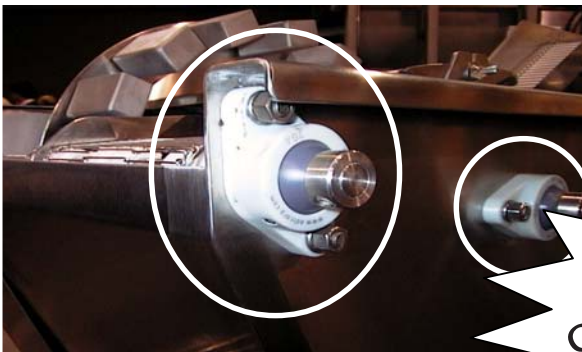

1 Year
GUARANTEED
Application

NOTHUM PILOT LINE BATTERER INFEEED BATTERER PADDLE WHEEL DRIVE BEARING



NA2GA7-5/8

Wire belt conveyor

| | Original Bearing | EDT Bearing |
|----------------------|---|--|
| Bearing | Cast Iron housings with carbon steel bearings | NA2GA7-5/8 and NA2GE7-1-1/4, NA Poly-Round® Solution® polymer inserts with stainless locking sleeves in polymer housings (EDT catalog section J shows these in all styles and sizes) |
| Failure | Bearing will fail due to corrosion and over or under-greasing and require regular maintenance | Bore elongates over time, but insert can be replaced and housing and sleeve reused. |
| Length of Service | 2-4 months (in washdown) | 12+ months in washdown (guaranteed application) |
| Maintenance Required | Regular greasing and change-outs | Requires no interim maintenance after initial installation. |
| Features & Benefits | Low initial cost | Lower maintenance, reduced maintenance cycles, longer life, lower ownership costs. |